


## HIGH-INTENSITY DUAL OBSTRUCTION LIGHT STANDARDS (FAA Style G) STRUCTURE WITH APPURTENANCE 40 ft (12 m) OR LESS

Day Protection = 270,000 cd White Light  
 Twilight Protection = 20,000 cd White Light  
 Night Protection = 2,000 cd Red Light

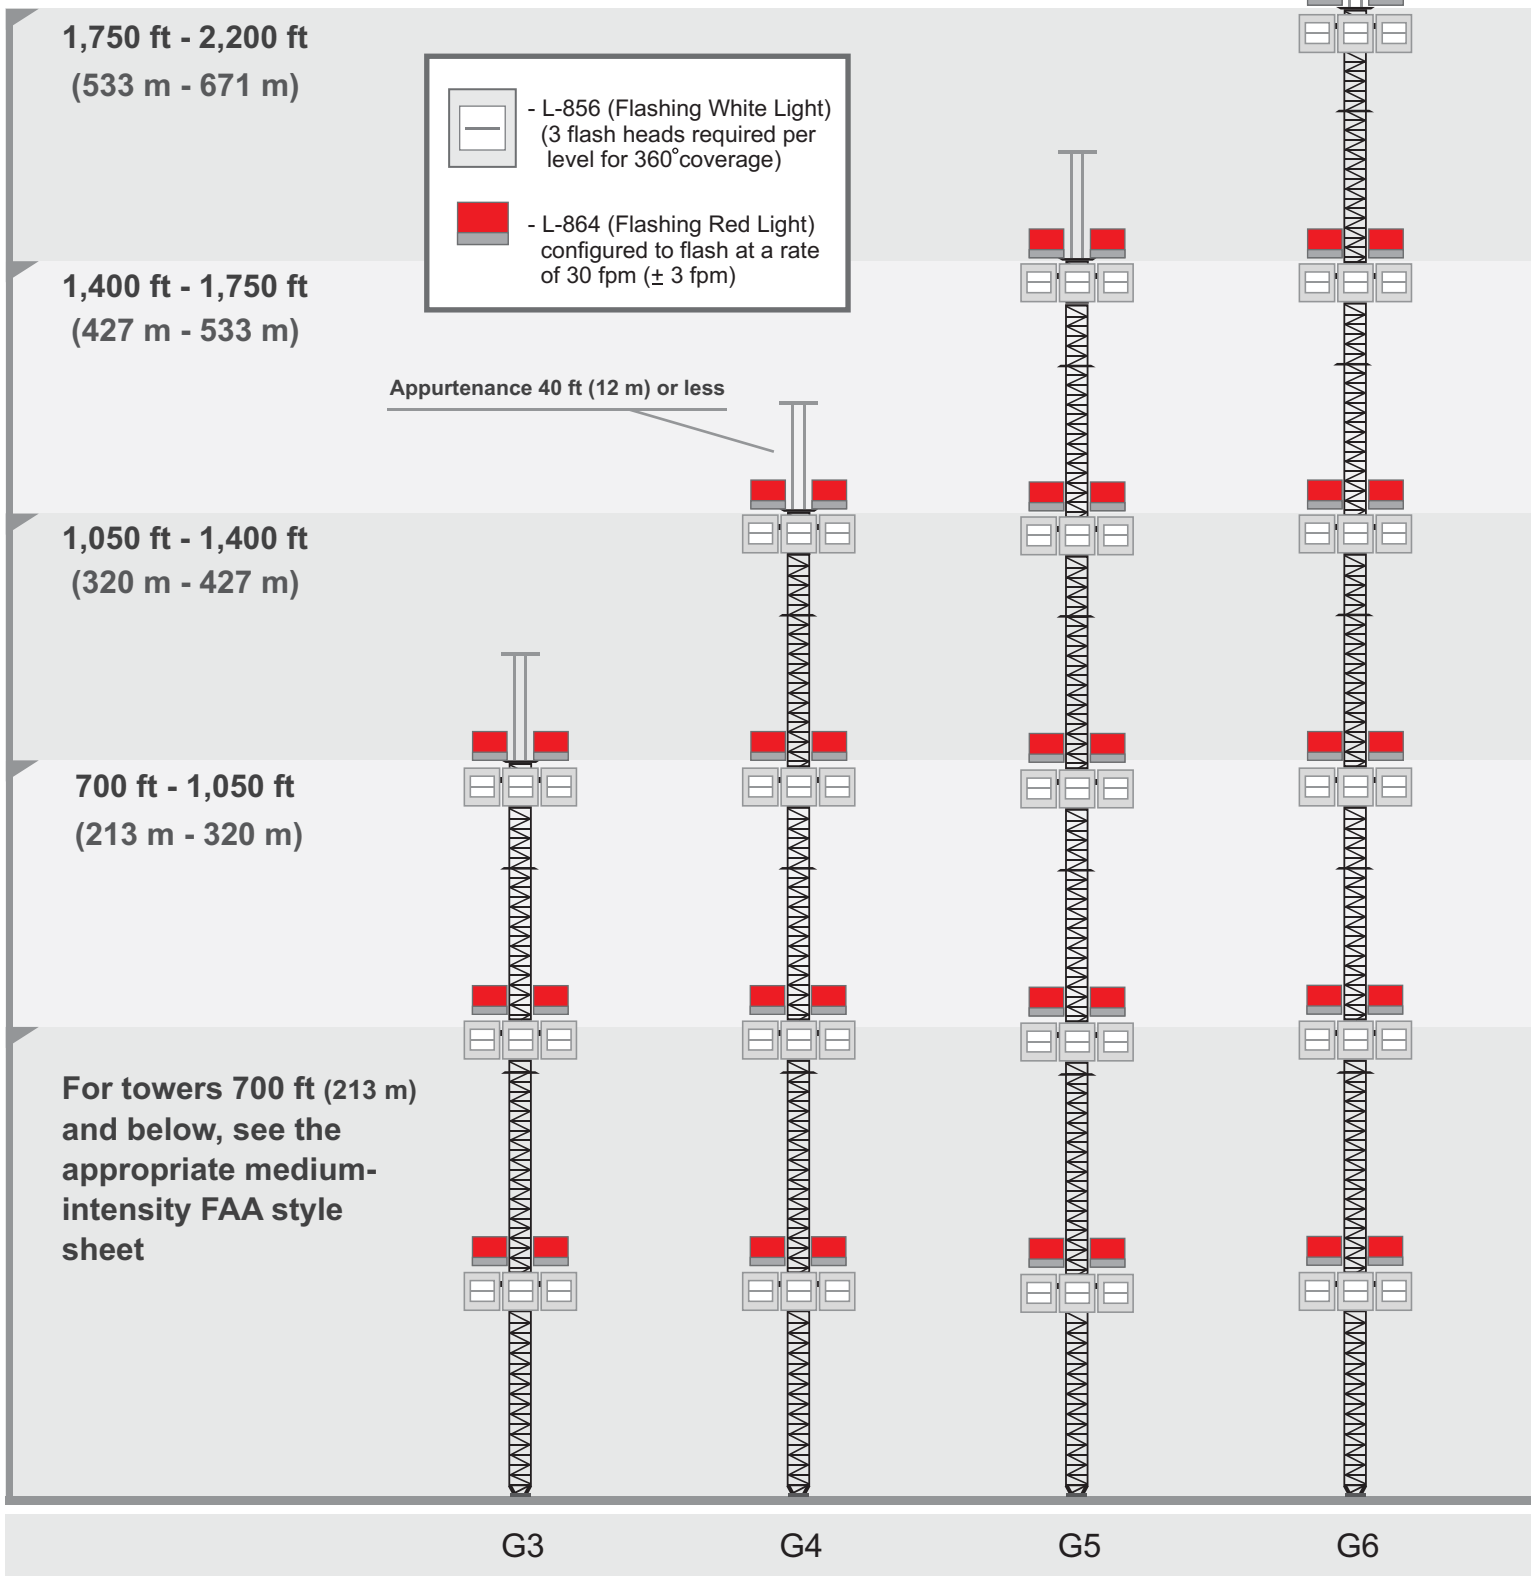

This is a guideline only. Please refer to FAA advisory circular 70/7460-1L and subsequent revisions.