HIGH-INTENSITY WHITE OBSTRUCTION LIGHT STANDARDS (FAA Style B)

STRUCTURE WITH APPURTENANCE 40 ft (12 m) OR LESS

Day Protection = 270,000 cd White Light
Twilight Protection = 20,000 cd White Light
Night Protection = 2,000 cd White Light

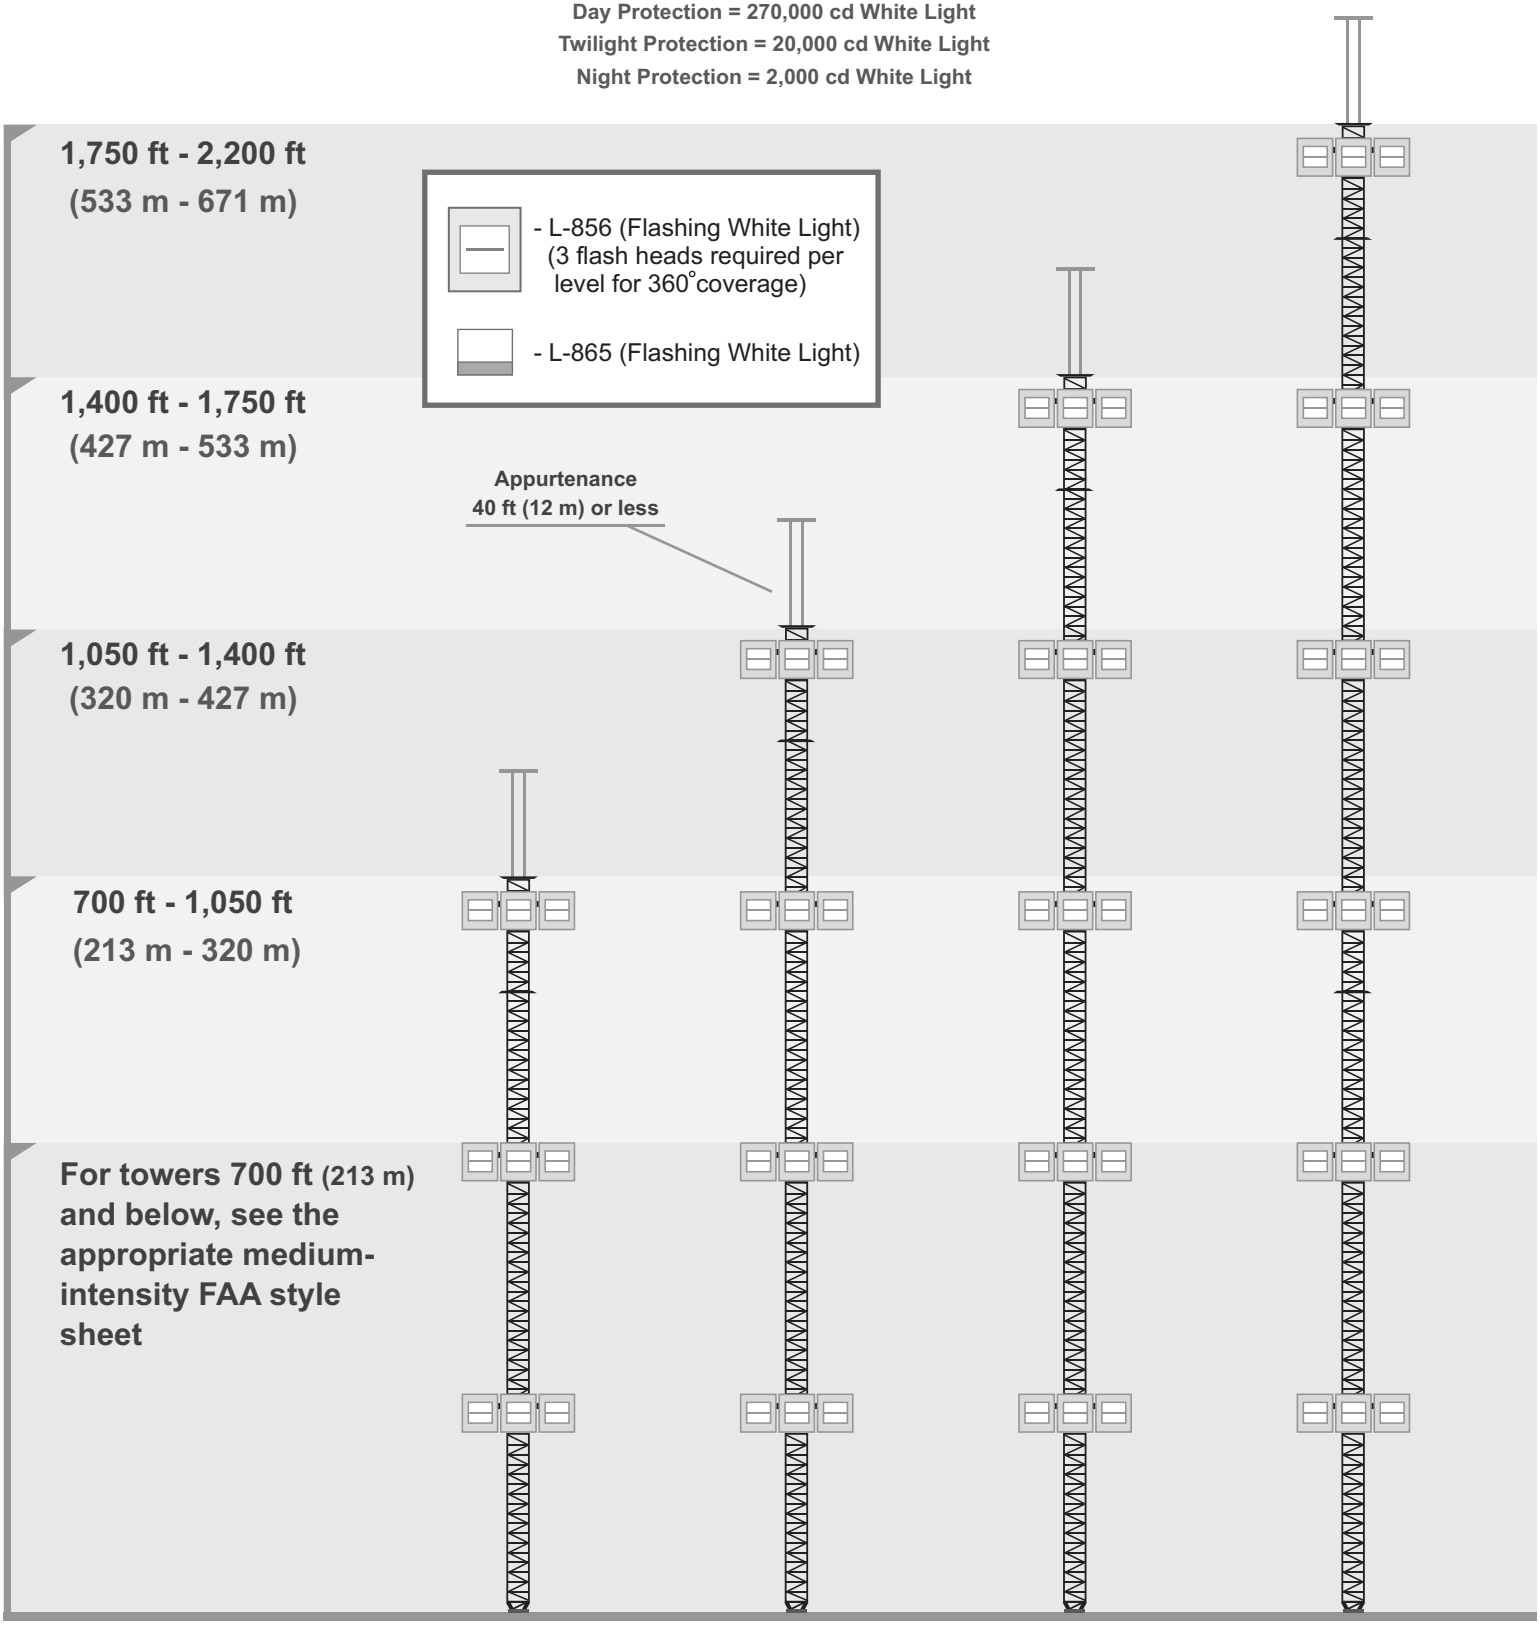

This is a guideline only. Please refer to FAA advisory circular 70/7460-1N and subsequent revisions.

© 2026 All rights reserved. Headquarters: 4818 East Ben White Boulevard, #107 Austin, Texas 78741 www.LumenServe.com info@LumenServe.com (512) 580-4600